



## Airstop Plasto Tape

### DESCRIPTION

**Airstop Plasto Tape** is a butyl rubber adhesive tape with fleece base that can be painted over and plastered over. The divided backing strip permits exact work in corners and at intersections.

### BENEFITS/USAGE

- Connection points with masonries that are to be plastered or painted over
- Divided backing strip
- Use primarily around roof and wall junctions
- Very strong butyl adhesive
- Surface irregularities in the substrate can be compensated for with a thick adhesive layer
- **Can be plastered over & painted**

### PREPARATION

Any surface being adhered to should be properly prepared and must be free from dust and grease and substrates must be dry. For porous substrates such as XPS, concrete, masonry, etc., please use **Bubi LF Bonding Primer** where necessary. The greater the pressure applied, the better the performance of the adhesive tape.

### APPLICATION


Apply off the roll or cut to desired length. Press firmly into position. For further information see our application guidelines.

### NOTE

**Airstop Flex Fee Tape** functions as a seal and not as a mechanical fixing. Please pay attention to our guidelines for installation!

### PROPERTIES

Composition	Butyl-rubber adhesive tape combined with non-woven fabric		
Roll Width	75mm	100mm	150mm
Roll Length	25m	25m	25m
Rolls/Carton	4	2	2
Thickness	Approx. 1.5mm		
Temperature Resistance	-40°C to + 100°C		
Working Temperature	From +5°C		
Resistance to Ageing	10 years		
Storage	Cool and dry		
Storage	2 years		
Colour	Grey, with white fleece		

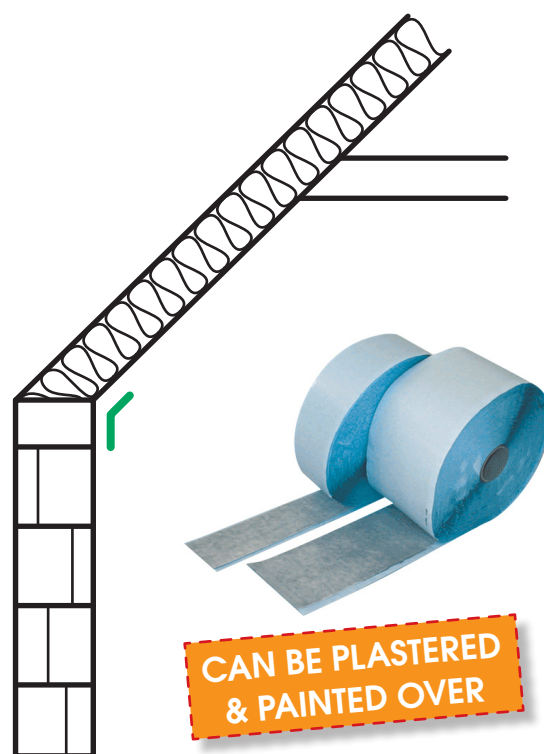

**DIVIDED BACKING STRIP FOR EASY WINDOW AND CORNER APPLICATION**