

#### FIELD OF APPLICATION

- Openings for conduits
- Openings in Roof sloping

#### ADVANTAGES

- extremely flexible
- resistant to ageing
- rubber heat-resistant up to 160° (short-term)

## AIRSTOP Foldable Conduit Sleeve FRGD

To enable vapour retarders and other materials to fulfil their purpose as airtight layer in a construction these must have air-tight joints at openings for conduits. Warm air finds its way inside a building component through even the smallest of holes in the vapour retarder, where it then condenses. An airtight sealing with AIRSTOP Foldable Conduit Sleeves, guarantee that the construction is windtight and air-tight.

#### AVAILABLE IN THE FOLLOWING DIMENSIONS

Item FRGD	100	150
For conduit entry with diameter	100 - 125 mm	150 - 165 mm
Outer dimension	350 mm	350 mm
Carton contents / Pieces	4	4

#### PRODUCT DATA

Composition	EPDM rubber and adhesive pad with pure acrylate adhesive
Temperature resistance of adhesive	- 40 °C - + 100 °C
Working temperature	- 5 °C - + 40 °C
Age resistance of adhesive	30 years
Storage	cool and dry
Colour	black, sealing plaster white with green imprint

INFO :  
+43 6216 / 4108  
WWW.ISOCELL.COM

**ISOCELL**


## PROCESSING GUIDELINES

### AIRSTOP Foldable Conduit Sleeve FRGD

Pull the rubber sleeve over the conduit and attach to the air-tight layer (vapour barrier, OSB,...) by the integrated sealing plaster. The diameter of the sleeve selected must have the appropriate dimension for the conduit entry point!

The materials used must be free from dust and grease and substrates must be dry and supporting. The greater the pressure applied, the better the performance of the sealing plaster!

On highly porous and very absorbent substrates such as concrete, plaster, untreated steel or raw wood, we recommend pre-treatment of the substrate with our ISOCELL primers.

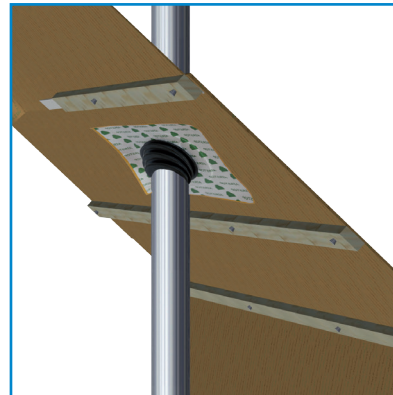

INFO :

+43 6216 / 4108

[WWW.ISOCELL.COM](http://WWW.ISOCELL.COM)

**ISOCELL**