



OMEGA Alu Tape

To ensure the air and wind-tightness of a building's shell the membranes or sheeting materials used must be permanently sealed at overlaps, gaps, joins and penetrations areas.


OMEGA ALU Tape has a tear-resistant backing of aluminium/polyester composite membrane coated with bitumen adhesive with excellent bonding properties which is also age-resistant and UV-resistant.

FIELD OF APPLICATION

- used as repair tape in the roof area
- a seal and repair for gaps, guttering, flashing at eaves and valleys as well as ventilation and drainage pipes and connections
- for doorstep joints outdoors

ADVANTAGES

- strong adhesion
- Backing strips
- UV-resistant

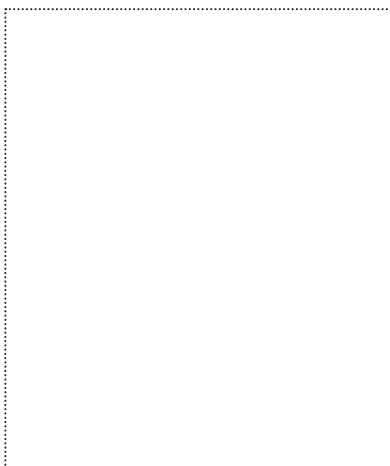

AVAILABLE IN THE FOLLOWING DIMENSIONS

Roll length	10 m	10 m	10 m	10 m	10 m
Roll width	50 mm	100 mm	150 mm	200 mm	300 mm
Rolls/carton	12	6	4	3	2
Backing strips	-	50/50	75/75	100/100	150/150

PRODUCT DATA

Composition	ALU/ PETP composite/ elastomer bitumen
Thickness	1,5 mm
Working temperature	- 5 °C - + 40 °C
Resistance to temperature	- 40 °C - + 100 °C
UV-resistance	durable
Colour	silver/black
Storage	cool and dry

INFO :
+43 6216 / 4108
WWW.ISOCELL.COM

ISOCELL

PROCESSING GUIDELINE

OMEGA Alu Tape

Materials used must be free from dust and grease and the substrates must be dry and firm. OMEGA ALU Tape functions neither as a seal nor as a tight bond. Optimum adhesion to the substrate is achieved in combination with BUBI LF Adhesive Primer or with UNI primer.



INFO :
+43 6216 / 4108
WWW.ISOCELL.COM

ISOCELL