



## OMEGA Alu- Butyl Foldable Conduit Sleeve FRGD

A fast and permanent sealant for penetrations in bitumen vapour retarders, roofing membrane, soft fibre-board, OSB, under-roof sheathing, concrete floors etc.

The high-stretch EPDM sleeve has a butyl adhesive collar, provides extremely strong adhesion and is tear-resistant. At the same time it gives the required strain relief. The alu coating makes the sleeve water-repellent and UV-resistant.

### FIELD OF APPLICATION

- Openings for conduits
- Openings in Roof sloping

### ADVANTAGES

- extremely flexible, for roofs with greater slope
- resistant to UV
- integrated butyl- sealing plaster
- rubber heat-resistant up to 160°C (short-term)

### AVAILABLE IN THE FOLLOWING DIMENSIONS

| Item FRGD                       | FRGD 100     | FRGD 150     |
|---------------------------------|--------------|--------------|
| For conduit entry with diameter | 100 - 125 mm | 150 - 165 mm |
| Outer dimension                 | 350 mm       | 350 mm       |
| Carton contents / Pieces        | 4            | 4            |

### PRODUCT DATA

|                                    |   |
|------------------------------------|---|
| Composition                        | EPDM rubber with pure butyl adhesive collar, alu coated |
| Temperature resistance of adhesive | - 40 °C - +100 °C                                       |
| Working temperature                | + 5 °C - +40 °C   |
| Storage                            | cool and dry  |
| Colour                             | black, adhesive collar alu                              |

INFO :

+43 6216 / 4108

WWW.ISOCELL.COM


**ISOCELL**

## PROCESSING GUIDELINES

### OMEGA Alu- Butyl Foldable Conduit Sleeve FRGD

Pull the rubber sleeve over the conduit and attach to the air-tight layer (vapour barrier, OSB, ...) by the adhesive collar. The diameter of the sleeve selected must have the appropriate dimension for the conduit entry point! The materials used must be free from dust and grease and substrates must be dry and supporting.

On porous material like wood or concrete, ... the use of BUBI LF Bonding Primer is recommended. The greater the pressure applied, the better the performance of the sealing plaster.

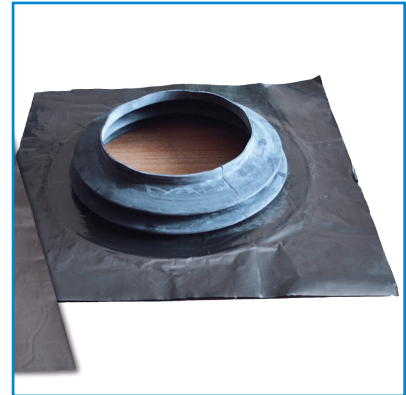

INFO :

+43 6216 / 4108

[WWW.ISOCELL.COM](http://WWW.ISOCELL.COM)

**ISOCELL**